


# Thrombolyzer Compact X

## Proven. Tough. Reliable.

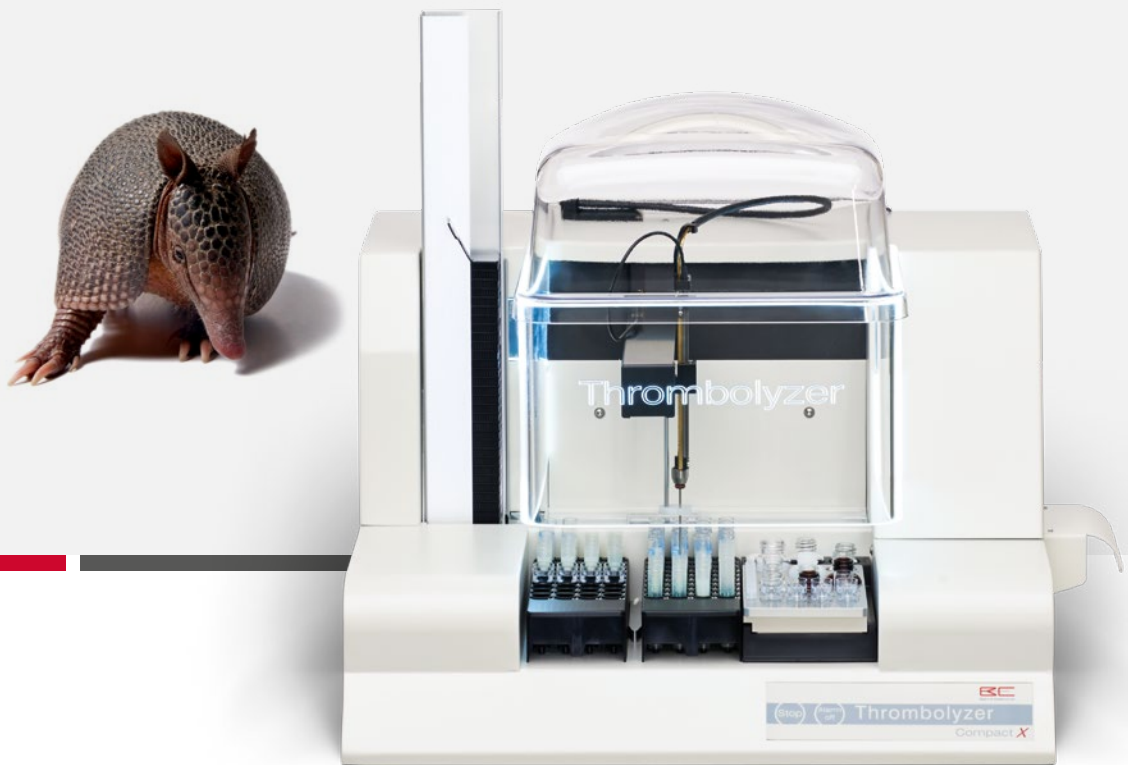

The Thrombolyzer Compact X is a fully-automated in vitro coagulation analyzer which delivers high quality results with the reliability of the established Behnk Thrombolyzer series for low and mid-volume labs.

- **Precision and Correctness**

Normal or interference samples are monitored by the system photometer which automatically changes both light intensity and wavelength. This feature, combined with a rotating steel ball amplifies the measuring signal, secures precision and correctness of each result. Results out of specification are automatically repeated; possibly with a different dilution or reflex test.

- **Productivity and Efficiency**

Continuous loading and the on-board capacity of samples, reagents and consumables ensure an uninterrupted workflow and a long walk-away-time. With a maximum throughput of 160 tests/h, the analyzer is suitable for all low and mid-volume labs.

- **Practicality and Reliability**

Just a few minutes of daily and weekly maintenance are enough to keep the system up and running. That means lower instrument downtime, less lab personnel expenditure of time and higher processing capacity for patient samples. Compact X, like all Thrombolyzer systems, is well known for reliability with very low operating and maintenance costs.

## Thrombolyzer Compact X Specifications:

Sample throughput / with Cap piercing	160 tests/h / -	Interference detection	✓
STAT samples	✓	User-defined tests	✓
Time from standby to first PT result	~ 5 min.	Patient data storage	> 100.000
Sample identification	External barcode reader	Reaction curve availability	✓
Positive reagent identification	X	Full reagent and sample result traceability	✓
Clotting, Chromogenic, Immunologic tests	✓	Reagent positions (cooled) / stirring positions	16 / 2
Cap piercing for variable primary receptacles	X	Sample capacity	32
Continuous loading of cuvettes, samples, reagents	✓	Cuvette capacity	240
Continuous operation / walk-away-time	> 1 hour	Quality control program	✓
Calibration fully automatic	✓	Low maintenance effort	Daily 5 min. / weekly 25 min.
Reaction curve plausibility check	✓	Operating system	LINUX
Micro clot detection	✓	Security system	Three security levels
Automatic test repetition	✓	LIS Interface	Bi-directional
Reflex tests	✓	Power consumption	100 VA
Wavelength	405 nm, 620 nm	Sound level	65 dB (A)
Digital light adjustment	✓	Analyzer dimensions (L x W x H)	56 cm x 55 cm x 58 cm
		Weight	27.5 kg
		Mains voltage	100 - 240 V



For further information please feel free to contact us  
 Phone: +49 (0) 40 - 529861-0  
 Fax: +49 (0) 40 - 52 98 61-99  
 info@behnk.de  
 behnk.de

Kommanditgesellschaft  
 Behnk Elektronik GmbH & Co.  
 Hans-Böckler-Ring 27  
 22851 Norderstedt  
 Germany